
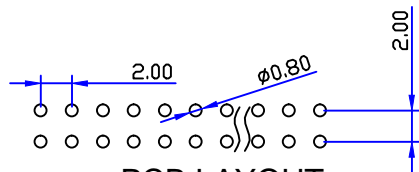
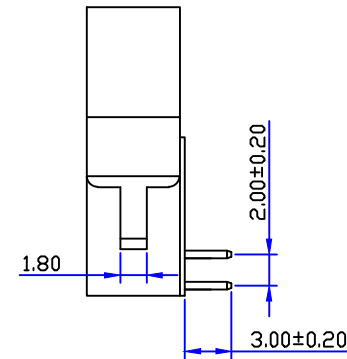


SPECIFICATIONS

Current Rating: 1Amps
 Insulator Resistance: 5000Megohms min
 Dielectric Withstanding: AC500 V
 Operating Temperature: -40°C~+105°C
 Contact Material: Copper Alloy
 Insulator Material: Polyester,UL94V-0
 Standard:PA6T
 Finish: Gold Plated

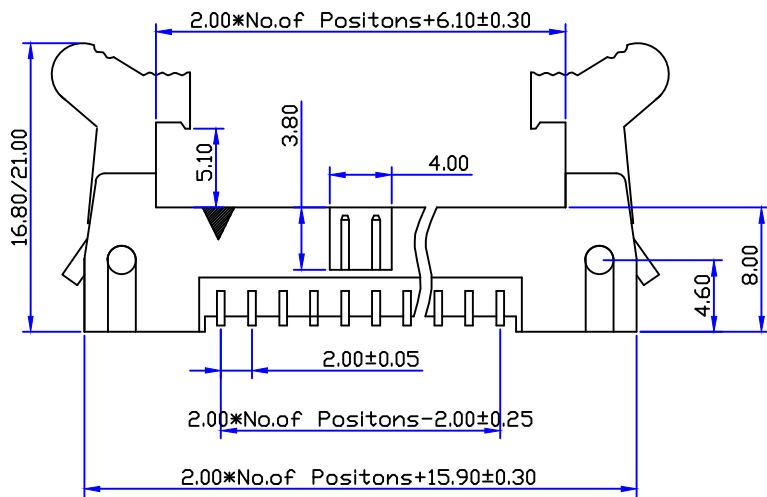

PCB LAYOUT

E				Units	mm	Scale	2:1	Drawing By	Date	Lycn ® 深圳市联益电子有限公司 HTTP://WWW.LYCONN.COM	Title	2.0牛角 /90度/L=9.5 13.5			
D				Tolerance Unless Otherwise Specified				Check By	Date			Date	2012/11/06	Sheet	1 of 1
C										Approval By	Date	Thirt Angle Projection	Drawing No.	EH200-R-0950-020	REV
B												File Path	M/F/MA/SXTZ/ZJL	A	
A				RELEASED											
REV	ZONE	LTR	DESCRIPTION.	ECN.NO.	Date	.X ~ ±0.30	.XX ~ ±0.25	.XXX ~ ±0.20	Angle ~ ± 3°						