



Downside contact  
(下接)

### SPECIFICATIONS

Poles: 3~35  
 Voltage rating: 60V DC/AC(200Hz)  
 Current rating: 0.5A,AC,DC  
 Withstand voltage: 200V AC/minute  
 Working Temperature: -20° C~+85° C  
 Insulations resistance:  $\geq 500\text{M}\Omega$   
 Contact resistance:  $\leq 0.03\Omega$   
 Single Contact

### TERMINAL

Material: Nylon66 UL94V-0  
 Material: Phosphor bronze

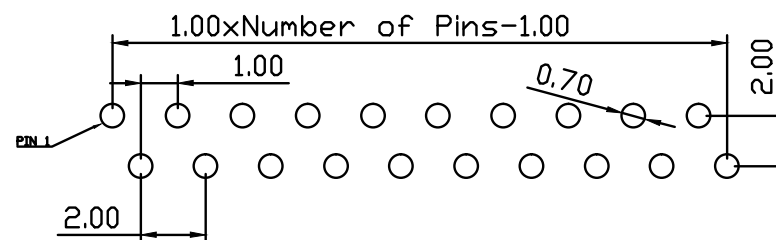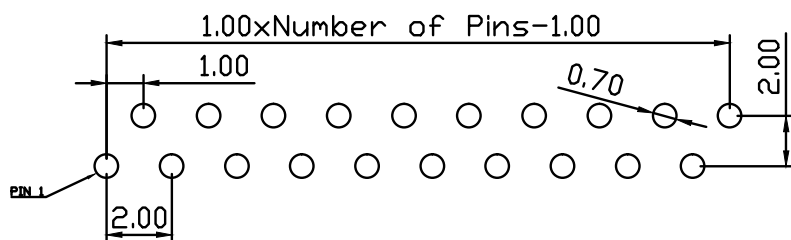

|   |   |   |   |                                      |    |       |     |                        |      |  |        |             |                  |      |
|---|---|---|---|--------------------------------------|----|-------|-----|------------------------|------|--|--------|-------------|------------------|------|
| E |   |   |   | Units                                | mm | Scale | 4:1 | Drawing By             | Date | <b>Lycn</b> ® 深圳市联益电子有限公司<br>HTTP://WWW.LYCONN.COM |        |             |                  |      |
| D |   |   |   | Tolerance Unless Otherwise Specified |    |       |     | Check By               | Date |  |        |             |                  | Date |
| C |   |   |   | .X ~ ±0.30                           |    |       |     | Approval By            | Date | Sheet  | 1 of 1 | Drawing No. | LY-FPC100-XX-065 | REV  |
| B |   |   |   | .XX ~ ±0.25                          |    |       |     | Thirt Angle Projection |      |  |        | File Path   | M/F/MA/GCTZ/FPC  | A    |
| A |   |   |   | .XXX ~ ±0.20                         |    |       |     |                        |      |  |        | REV         | ZONE             | LTR  |
| 1 | 2 | 3 | 4 | 5                                    | 6  | 7     | 8   |                        |      |  |        |             |                  |      |