


P.C.B LAYOUT

**SPECIFICATIONS:**

Current rating:2.0AMP  
 Contact Resistance:30mΩ Max  
 Insulation Resistance:1000MΩ Min.at DC 500V  
 Withstand Voltage:1000VAC for one minute  
 Operating Temperature:-40°Cto+105±C

**MATERIALS:**

Contacts Material:Phosphor Bronze  
 Flammability Rating:UL 94V-0  
 Insulator Material:30% Glass Filled PBT

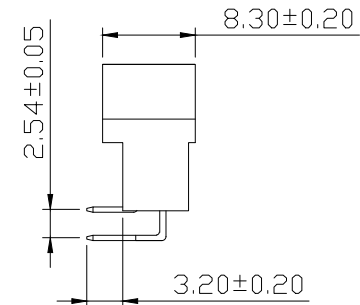

|     |          |          |                     |    |       |       |             |      |                                      |        |                       |                      |            |
|-----|----------|----------|---------------------|----|-------|-------|-------------|------|--------------------------------------|--------|-----------------------|----------------------|------------|
| E   |          |          | Units               | mm | Scale | 1.5:1 | Drawing By  | Date | 深圳市联益电子有限公司<br>HTTP //WWW.LYCONN.COM |        |                       |                      |            |
| D   |          |          | Tolerance Unless    |    |       |       | Reviewed By | Date |                                      |        |                       | Date                 | 2008/03/11 |
| C   |          |          | Otherwise Specified |    |       |       |             |      | Sheet                                | 1 of 1 | DIN 41612 欧式插座/90°/公座 |                      |            |
| B   |          |          | .X                  | ~  | ±0.30 |       | Approval By | Date | Third Angle Projection               |        | Drawing No.           | LY-DIN41612M-264-009 | REV        |
| A   | RELEASED | 03/11/08 | .XX                 | ~  | ±0.25 |       |             |      |                                      |        | F/Name                | E: /CAD/WLJ          | A          |
| REV | ECN.NO.  | Date     | .XXX                | ~  | ±0.20 |       |             |      |                                      |        | Angle                 | ~                    | ± 3°       |