

Pin Header

Pitch: 2.00mm

Triple Row/Straight DIP Type


2.00mm 单塑三排排针/直插

Series

322



Http://www.lyconn.com

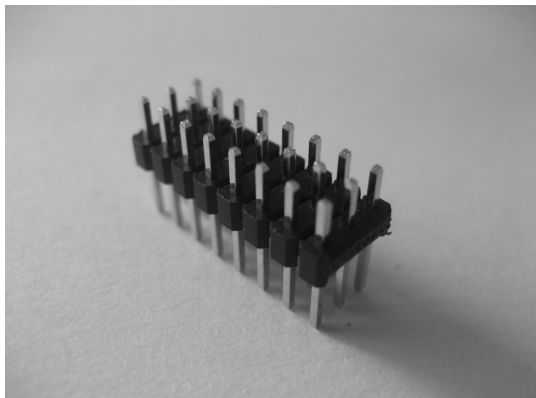


SPECIFICATIONS (技术参数):

Current Rating (额定电流): 2.0 AMP
 Contact Resistance (接触电阻): 30mΩ Max
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Withstand Voltage (耐压值): 500VAC/minute
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质): Copper Alloy
 Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni
 Insulator Material (绝缘体材质): Polyester (UL94V-0)
 Standard: PBT

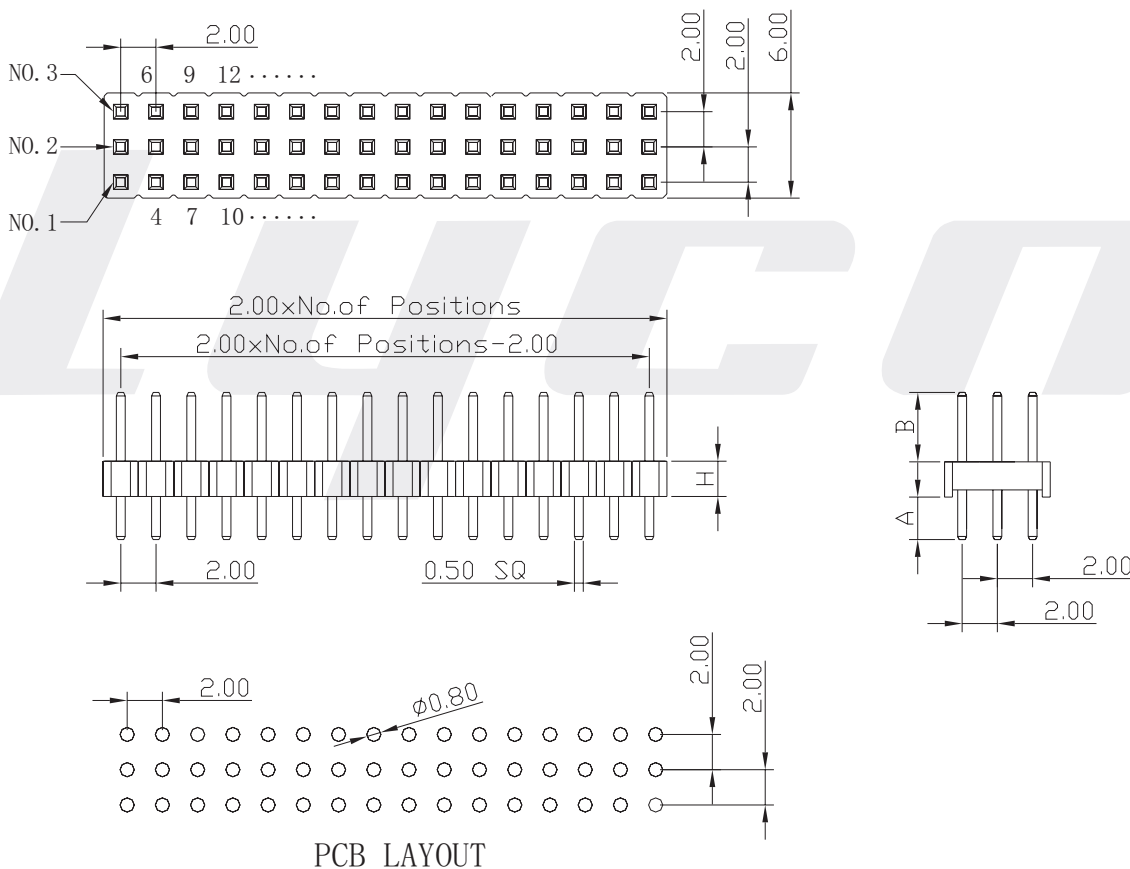

Ordering Code		
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨	④ Dip Spacing: 3=Triple row	⑦ Contact Plated 0=Tin 1=Gold Flash 2=Gold 3u" 3=Gold 5u" 4=Gold 10u" 5=Gold 15u" 6=Gold 30u"
3 2 2 3 XX S X X 1	⑤ Number of Contacts: Triple row = 03 to 120	⑨ Tiers of Body 1 = Single tier 2 = Double tier 3 = Triple tier
① Series No.: 3= Pin Header	⑥ Tail & Mounting Style: S=Straight DIP type R=Right Angle DIP Type M=Straight SMT type	⑧ Material Type 0=PPS 3=Nylon-66 1=PBT 4=Nylon-6T 2=LCP 5=PA46
② Pitch: 2= 2.00mm	③ Insulator Height: 2 = 2.00mm	



Pin Header

Pitch: 2.00mm

Quad Row/ Straight DIP Type


2.00mm 单塑四排排针/直插

Series

322

Lycn®

Http://www.lyconn.com




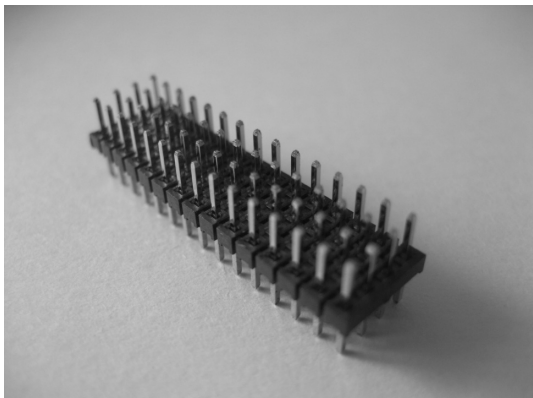


SPECIFICATIONS (技术参数):

Current Rating (额定电流): 2.0 AMP
 Contact Resistance (接触电阻): 30mΩ Max
 Insulation Resistance (绝缘电阻): 1000MΩ Min
 Withstand Voltage (耐压值): 500VAC/minute
 Operation Temperature (工作温度): -40°C to +105°C

MATERIALS (材质):

Contact Material (接触件材质): Copper Alloy
 Contact Plating (接触件电镀): Gold or Tin over 50 μ "Ni
 Insulator Material (绝缘体材质): Polyester (UL94V-0)
 Standard: PBT

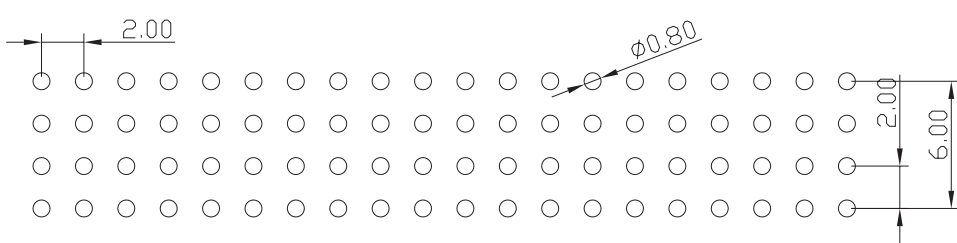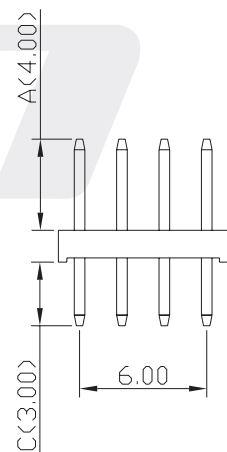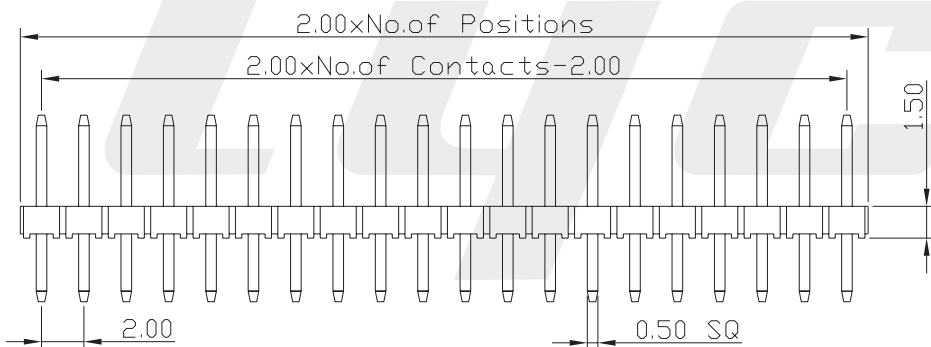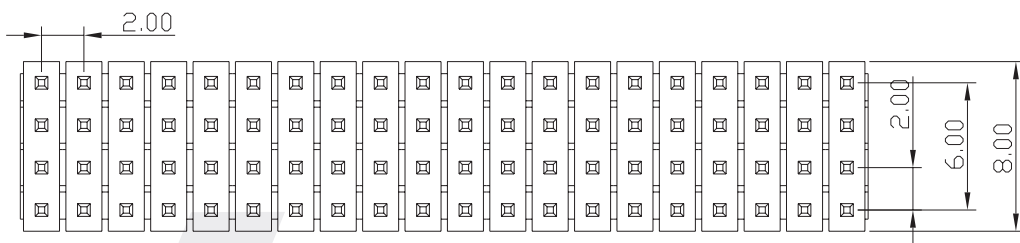

P.C.B LAYOUT

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨
 3 2 2 4 XX S X X 1

① Series No.: 3= Pin Header
 ② Pitch: 2= 2.00mm
 ③ Insulator Height: 2= 2.00mm

④ Dip Spacing: 4=Quad row
 ⑤ Number of Contacts: Quad row = 04 to 160
 ⑥ Tail & Mounting Style: S=Straight DIP type, R=Right Angle DIP Type, M=Straight SMT type

⑦ Contact Plated: 0=Tin, 1=Gold Flash, 2=Gold 3u", 3=Gold 5u", 4=Gold 10u", 5=Gold 15u", 6= Gold 30u"
 ⑧ Material Type: 0=PPS, 1=PBT, 2=LCP, 3=Nylon-66, 4=Nylon-6T, 5=PA46

⑨ Tiers of Body: 1 = Single tier, 2 = Double tier, 3 = Triple tier

Due to technical progress, all the information provided is subject to change without prior notice.

