P1

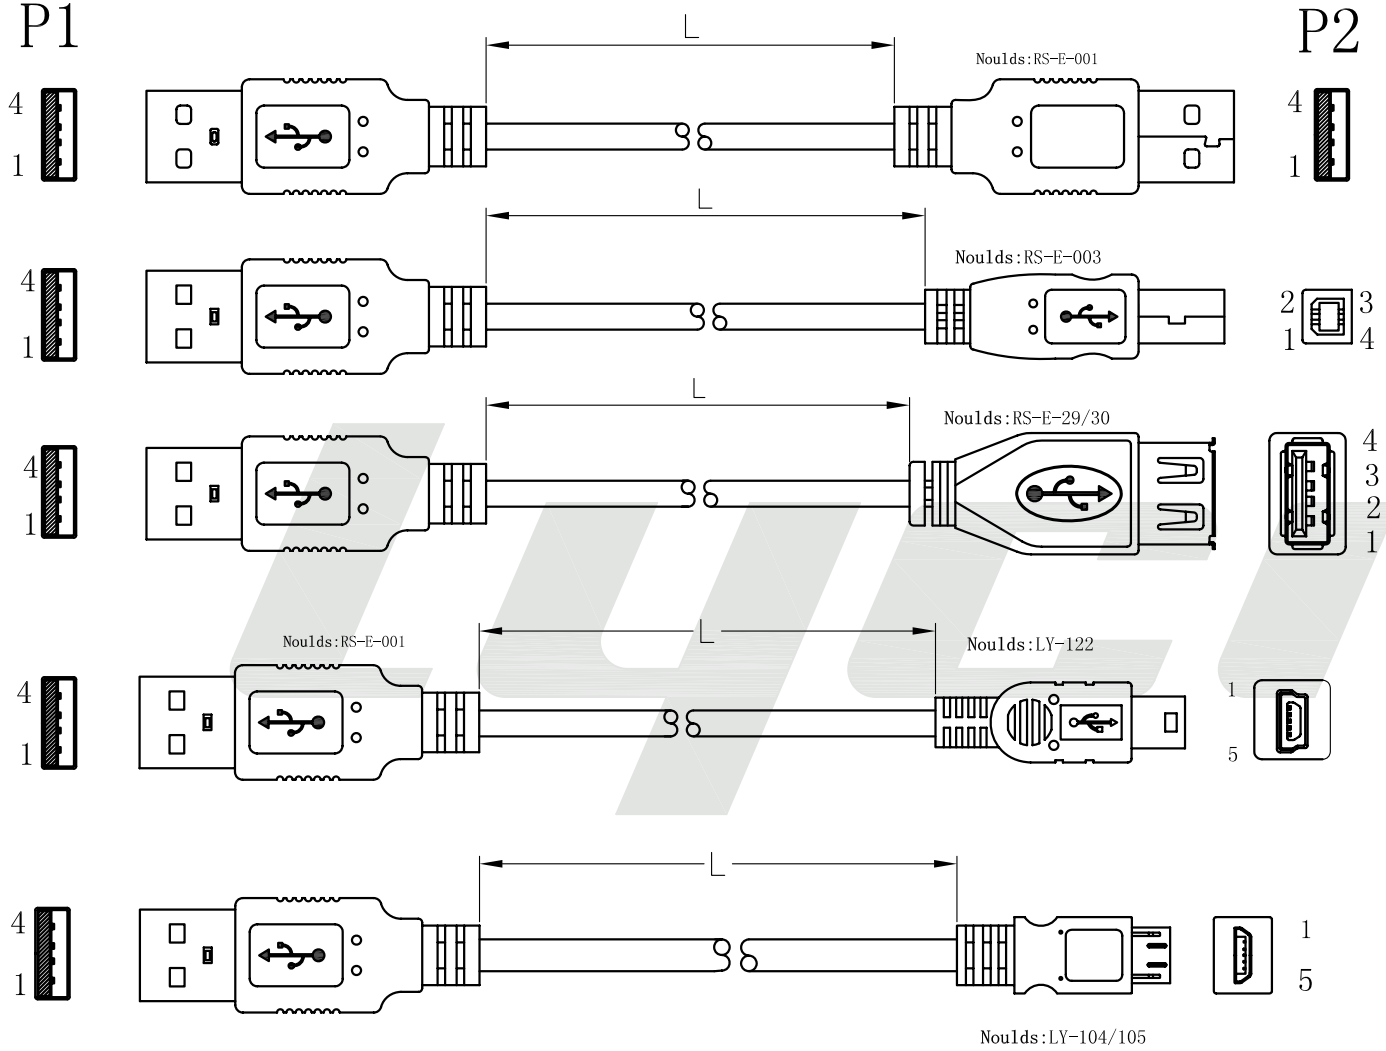

P2

1.100% Continuny Tesf。
Any Open OR Miswire,Short OR Intermitence Are Not Permitted。
2.Insulation Resistance:20M Ohms Min。
3.Conductor Resistance:3 Ohms Max。

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦
L3 X X X X X X

① Series No. :
L3

② Contact type:
A=USB A/M+USB A/M
B=USB A/M+USB A/F
C=USB A/M+USB B/M
D=USB A/M+Mini USB
E=USB A/M+Micro USB

③ Connector Color:
1=Black
2=White
3=Blue
4=Gray

④ PVC Jacket Color:
A=Black C=Gray
B=White D=Beige
C=Blue

⑤ Cable Option:
A=Non UL
B=Non UL(Braid Shiele)
C=UL 2725 28*1p/24*2c
D=UL 2725 28*1p/26*2c
E=UL 2725 28*1p/28*2c

⑥ Wire Length:
A=1ft R=1m
B=2ft S=2m
C=3ft T=3m
D=4ft K=4m
E=5ft L=10m
F=6ft M=15m
G=7ft N=20m
H=8ft P=50m
I=9ft
J=15ft
X=Custom Dimension

⑦ Cable OD(MM)
E=3.0 F=3.5
G=4.0 H=4.5
I =4.7 J=5.0
O=No Required

REV	ZONE	LTR	DESCRIPTION.	ECN.NO.	Date
E					
D					
C					
B					
A			RELEASED		19/05-13

Units mm Scale 1:1

Tolerance Unless Otherwise Specified
.X ~ ±0.30
.XX ~ ±0.25
.XXX ~ ±0.20
Angle ~ ± 3°

Drawing By Date
Check By Date
Approval By Date

lycn® 深圳市联益电子有限公司
HTTP：//WWW.LYCONN.COM

Date 2012/05/19
Sheet 1 of 1
Title 2H/USB Cable Series
Thirt Angle Projection
Drawing No. LY-USB-2725-XXXX-XXXX REV
Sheet A