Box Header Pitch:2.54mm

Right Angle DIP Type

2.54简牛90度加排针塑胶

Series 301

lycn®

Http://www.lyconn.com

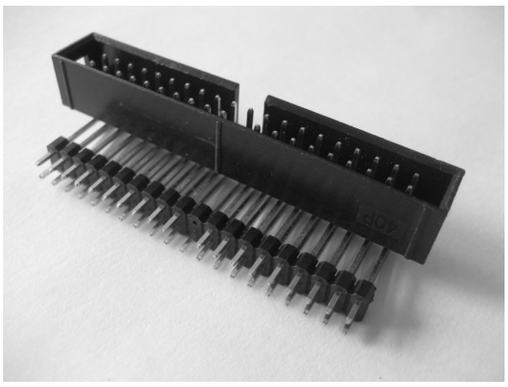

SPECIFICATIONS (技术参数):

Current Rating (额定电流):	3.0 AMP
Contact Resistance (接触电阻):	20mΩ Max
Insulation Resistance (绝缘电阻):	1000MΩ Min
Withstand Voltage (耐压值):	500VAC/minute
Operation Temperature (工作温度):	-40℃ to +105℃

MATERIALS (材质):

Contact Material (接触件材质):	Brass
Contact Plating (接触件电镀):	Gold or Tin over 50μ"Ni
Insulator Material (绝缘体材质):	Polyester(UL94V-0) Standard: PBT

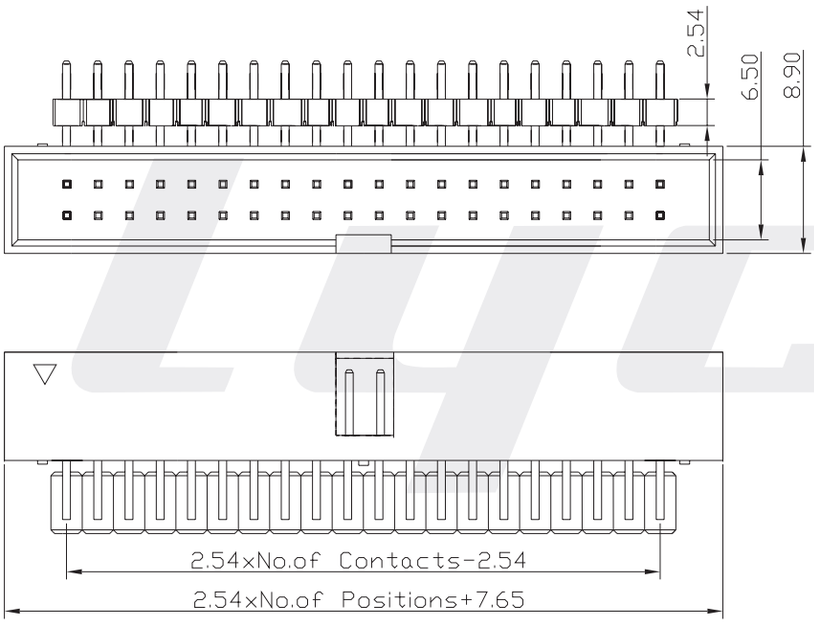

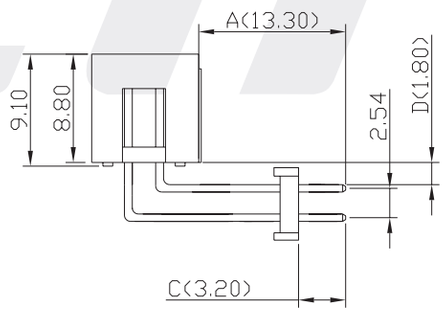

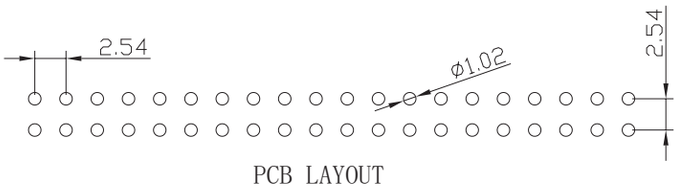

PCB LAYOUT

Ordering Code

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

30 1 0 XX X 1 X X 0

① Series No.:
30 = Box Header
39 = Ejector Header

② Pitch:
1= 2.54 x 2.54mm

③ Insulator Height:
0 = Straight

④ Number of Contacts:
10 Pin ~ 64 Pin

⑤ Tail & Mounting Style:
S=Straight Dip Type
R=Right Angle Dip Type
M=Straight SMT Type

⑥ Contact Plated
0=Tin
1=Gold Flash
2=Gold 3u"
3=Gold 5u"
4=Gold 10u"
5=Gold 15u"
6= Gold 30u"

⑦ Material Type
0=PPS
1=PBT
2=LCP
3=Nylon-66
4=Nylon-6T
5=PA46

⑧ Color:
B=Black
U=Blue
R=Red
W=White
Y=Yellow
G=Grey

⑨ Customer Request

Due to technical progress, all the information provided is subject to change without prior notice.

P40-148-k.prn
\\192.168.1.160\output\11-29\刘在位\P40-148-k.cdr
Monday, November 29, 2010 23:58:39